

# **Hitachi Integrated Systems Solution with Oracle Real Application Clusters Virtualized on Oracle Linux KVM Hypervisor with Hitachi Advanced Server HA820 G3 and Hitachi Virtual Storage Platform One Block 28**

---

Reference Architecture Guide

© 2025 Hitachi Vantara LLC. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including copying and recording, or stored in a database or retrieval system for commercial purposes without the express written permission of Hitachi, Ltd., Hitachi Vantara, Ltd., or Hitachi Vantara LLC (collectively “Hitachi”). Licensee may make copies of the Materials provided that any such copy is: (i) created as an essential step in utilization of the Software as licensed and is used in no other manner; or (ii) used for archival purposes. Licensee may not make any other copies of the Materials. “Materials” mean text, data, photographs, graphics, audio, video and documents.

Hitachi reserves the right to make changes to this Material at any time without notice and assumes no responsibility for its use. The Materials contain the most current information available at the time of publication.

Some of the features described in the Materials might not be currently available. Refer to the most recent product announcement for information about feature and product availability, or contact Hitachi Vantara LLC at [https://support.hitachivantara.com/en\\_us/contact-us.html](https://support.hitachivantara.com/en_us/contact-us.html).

**Notice:** Hitachi products and services can be ordered only under the terms and conditions of the applicable Hitachi agreements. The use of Hitachi products is governed by the terms of your agreements with Hitachi Vantara LLC.

By using this software, you agree that you are responsible for:

1. Acquiring the relevant consents as may be required under local privacy laws or otherwise from authorized employees and other individuals; and
2. Verifying that your data continues to be held, retrieved, deleted, or otherwise processed in accordance with relevant laws.

**Notice on Export Controls.** The technical data and technology inherent in this Document may be subject to U.S. export control laws, including the U.S. Export Administration Act and its associated regulations, and may be subject to export or import regulations in other countries. Reader agrees to comply strictly with all such regulations and acknowledges that Reader has the responsibility to obtain licenses to export, re-export, or import the Document and any Compliant Products.

Hitachi and Lumada are trademarks or registered trademarks of Hitachi, Ltd., in the United States and other countries.

AIX, DB2, DS6000, DS8000, Enterprise Storage Server, eServer, FICON, FlashCopy, GDPS, HyperSwap, IBM, OS/390, PowerHA, PowerPC, S/390, System z9, System z10, Tivoli, z/OS, z9, z10, z13, z14, z15, z16, z/VM, and z/VSE are registered trademarks or trademarks of International Business Machines Corporation.

Active Directory, ActiveX, Bing, Excel, Hyper-V, Internet Explorer, the Internet Explorer logo, Microsoft, Microsoft Edge, the Microsoft corporate logo, the Microsoft Edge logo, MS-DOS, Outlook, PowerPoint, SharePoint, Silverlight, SmartScreen, SQL Server, Visual Basic, Visual C++, Visual Studio, Windows, the Windows logo, Windows Azure, Windows PowerShell, Windows Server, the Windows start button, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation. Microsoft product screen shots are reprinted with permission from Microsoft Corporation.

All other trademarks, service marks, and company names in this document or website are properties of their respective owners.

The open source content used in Hitachi Vantara products may be found within the Product documentation or you may request a copy of such information (including source code and/or modifications to the extent the license for any open source requires Hitachi make it available) by sending an email to [OSS\\_licensing@hitachivantara.com](mailto:OSS_licensing@hitachivantara.com).

## Feedback

Hitachi Vantara welcomes your feedback. Please share your thoughts by sending an email message to [Docs-Feedback@hitachivantara.com](mailto:Docs-Feedback@hitachivantara.com). To assist the routing of this message, use the paper number in the subject and the title of this white paper in the text.

Thank you!

### Revision history

Changes	Date
Initial release	August 2025

---

# Reference Architecture Guide

The Hitachi Integrated Systems solution with Oracle RAC Database virtualized on an Oracle kernel-based virtual machine (KVM) using Hitachi Virtual Storage Platform One Block 28 and Hitachi Advanced Server HA820 G3 with 4th Generation Intel Xeon Scalable Processors provides reliability, high availability, and scalability while processing small to large Oracle workloads. This reference architecture provides a virtualized Oracle RAC Database 19c on Oracle KVM. In this solution, Oracle RAC Database nodes are deployed on Oracle KVM hosts with Oracle Linux 9.1 UEK 7 and guest virtual machines (VMs) with Oracle Linux 8.6 UEK 6.

The Hitachi Integrated Systems solution with Oracle RAC KVM virtualization is a fast, agile offering from Hitachi Vantara that makes efficient use of deployed resources. The goal of Oracle RAC virtualization using Oracle Linux KVM hypervisor is IT transformation because you want a fast and flexible journey to reduce costs and quickly scale your environment up or down.

The Oracle Linux KVM feature provides built-in kernel capabilities to use the Oracle Linux kernel as a hypervisor. It provides a full virtualization solution containing virtualization extensions (Intel VT or AMD-V) on Linux machines to create a two-node Oracle RAC environment.

The following components are used:

- Hitachi Virtual Storage Platform One Block 28 is used as a storage resource.
- Hitachi Advanced Server HA820 G3 with Intel® Xeon® Platinum 8470 Processor 52-core CPUs for storage and computing resources.
- Hitachi Advanced Server HA810 G3 with Intel® Xeon® Gold 6454S Processor 32-core CPUs for the management servers.
- Oracle KVM Hypervisor.
- Oracle Real Application Clusters (RAC).

Running Oracle RAC on Oracle KVM provides the following benefits:

- Oracle Linux KVM is an open source with no licensing cost.
- Conforms to the Oracle hard partitioning licensing requirement.
- Supports full hardware assisted virtualization.

This solution provides the flexibility to select storage and compute resources based on unique requirements. Deploy small databases as well as very large databases, depending on resource availability.

This document is for the following audiences:

- Database administrators
- Storage administrators

- System administrators
- IT professionals responsible for planning and deploying an Oracle Database solution

To use this document, you need familiarity with the following:

- Hitachi Virtual Storage Platform One Block 28
- Hitachi Advanced Server HA820 G3 servers
- Hitachi Advanced Server HA810 G3 servers
- Storage Area Networks
- Oracle Database administration
- Oracle Database release 19c, version 19.21
- Oracle Linux 9.1 for KVM hosts and Oracle Linux 8.6 for Guest OS



**Note:** Testing of this configuration was in a lab environment. Many factors affect production environments beyond prediction or duplication in a lab environment. Follow the recommended practice of conducting proof-of-concept testing for acceptable results in a non-production, isolated test environment that otherwise matches your production environment before your production implementation of this solution.

## Solution overview

Use this reference architecture to implement the Hitachi Integrated Systems solution with Oracle RAC virtualized on Oracle Linux KVM using Hitachi Virtual Storage Platform One Block 28 and Hitachi Advanced Server HA820 G3. This solution is engineered, pre-tested, and qualified to provide high performance and high reliability in demanding, dynamic Oracle environments. This reference architecture implements the Hitachi Integrated Systems solution with Oracle RAC Database using VSP One Block 28.

### Business benefits

Oracle Linux KVM consists of a loadable kernel module `kvm.ko`, which provides core virtualization infrastructure and a processor specific module `kvm-intel.ko` or `kvm-armv.ko`.

The following are some benefits of this reference architecture:

- Hard partitioning support complies with Oracle licensing rules.
- Reduces operation and support costs while increasing IT efficiency and agility — on premises and in the cloud with Oracle virtualization.
- Adds or removes servers in the Oracle KVM Manager pool based on business requirements.
- Has virtual machine snapshot capabilities.
- Has online VM migration with VM cloning features.
- Provides a solution for customers who want converged Oracle products.

## High-level infrastructure

The Hitachi Integrated Systems solution with Oracle RAC Database includes the following components:

- Hitachi Advanced Server HA820 G3 servers
- Hitachi Advanced Server HA810 G3 servers
- Hitachi Virtual Storage Platform One Block 28
- Hitachi Virtual Storage Platform E1090
- Brocade G720 64 Gbps SAN infrastructure
- Cisco 10/25 GbE LAN infrastructure


The configuration of Hitachi Virtual Storage Platform One Block 28 and Hitachi Advanced Server HA820 G3 has the following characteristics:

- Fully redundant hardware
- Dual fabric connectivity between hosts and storage



**Note:** The VSP E1090 is optional and not required in your environment. Data volumes can also be configured on the VSP One Block 28 or other VSP storage systems.

The following figure shows the high-level architecture diagram using VSP One Block 28 and HA820 G3 for a Two-Node Oracle 19c RAC configuration.

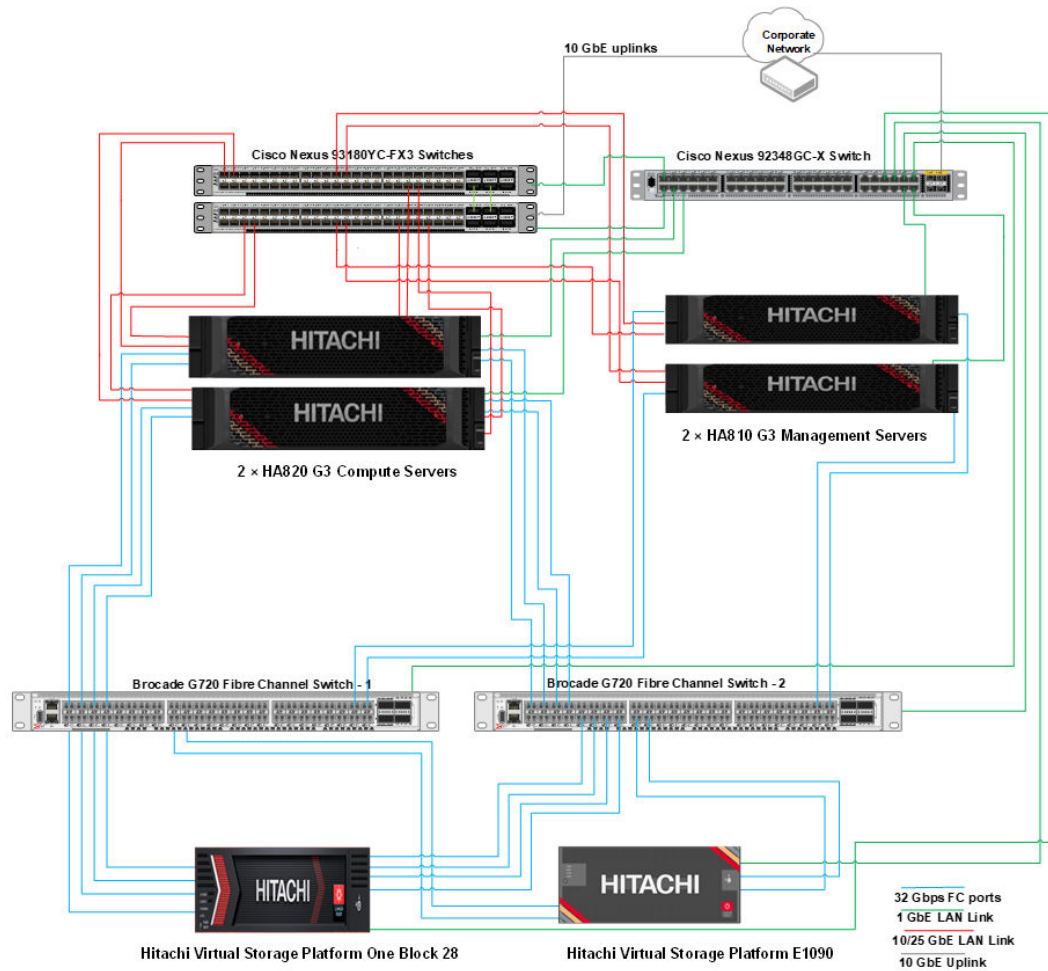

**Note:** Management servers are not used in this implementation. They are shown for reference only.

To avoid any performance impact to the production database, Hitachi Vantara recommends using a configuration with the following characteristics:

- A dedicated storage system for the production database.
- A dedicated storage system for storing backup data, if needed

The uplink speed to the corporate network depends on the customer environment and requirements. The Cisco Nexus 93180YC-FX3 switches used in this reference architecture can support uplink speeds of 25 GbE or 100 GbE if higher bandwidth is required.

## Key solution components

The key solution components for this solution are listed in the following tables. Detailed component information is provided in [Product descriptions \(on page 19\)](#).

The following table lists the hardware components used in this solution.

Vendor	Hardware	Detail Description	Version	Quantity
Hitachi Vantara	Hitachi Virtual Storage Platform One Block 28	6 × CHA pairs (8 × 64 Gbps Fibre Channel ports in use)  1024 GB cache memory  24 × 3.8 TB NVMe SSDs*	A3-02-00-40/03	1
	Hitachi Virtual Storage Platform E1090 – Management node storage system	Two Controllers  8 × 32 Gbps Fibre Channel ports  1024 GB cache memory  48 × 1.9 TB NVMe SSDs*	93-07-01-80/100	1
Hitachi Vantara	Hitachi Advanced Server HA820 G3	2 × Intel Xeon Platinum 8470 52 Cores CPUs @ 2.00GHz 64-bit  1024 GB memory  RDIMM DDR5-4800 MHz	iLO 6: 1.53 Oct 10 2023  System ROM: U54 v1.46(09/26/2023)	2
		2 × SN1610E 32 Gb 2p FC HBA	Firmware: 14.2.589.5  Driver: lpfc  Driver version: 14.0.0.1	
Brocade	G720 Fibre Channel switches	64 × 64 Gbps ports Fibre Channel switch  64 Gbps SFPs	Fabric OS: v9.1.1c	2
Cisco	Cisco Nexus N9K-C93180YC-FX3	48 × 10/25 GbE ports  6 × 40/100 Gbps Quad SFP (QSFP28) ports	BIOS: version 07.66  NXOS: version 7.0(3)I7(1)	1
	Cisco-C92348GC-X	48 × 1 GbE ports Ethernet switches	BIOS: version 05.42  NXOS: version 10.1(2)	1



**Note:** The solution was tested with PCIe and OCP Mezzanine NIC cards. Using all PCIe cards is recommended for consistency and better NIC bonding options. SATADOM, SAN boot, or local boot can be used for the boot option.





**Note:** Customers can choose larger capacity SSDs to fit their business requirements.

The following table lists software components for compute nodes.

Software	Version	Function
Oracle Linux	9.1 with 5.15.0-3.60.5.1.el9uek.x86_64 on KVM hosts  8.6 with 5.4.17-2136.307.3.1.el8uek.x86_64 on RAC VMs(Guest OS)	Operating system
Oracle Database	19c (Version 19.21.0.0.0)	Database software
Oracle Real Application Clusters	19c (Version 19.21.0.0.0)	Cluster software
Oracle Grid Infrastructure	19c (Version 19.21.0.0.0)	Volume management, file system software, and Oracle automatic storage management
Oracle ASM	2.12	Support ASM storage device for Oracle RAC

## Solution design

This section describes the reference architecture environment to implement the Hitachi Integrated Systems solution with Oracle RAC Database virtualized using KVM hypervisor. The environment uses Hitachi Virtual Storage Platform One Block 28.

The infrastructure configuration includes the following:

- Oracle KVM hosts — There are two hosts configured in an Oracle database environment.
- Storage System — There are raw disks mapped to each port that are presented to the server as LUNs.
- SAN Connection — There are SAN connections to connect the Fibre Channel HBA ports to the storage systems through Brocade G720 switches.


## Storage architecture

This section describes the storage architecture for this solution.

### Storage configuration

The storage configuration takes into consideration Hitachi Virtual Storage Platform and Oracle recommended best practices for the design and deployment of database storage.

The following figure illustrates the high-level storage configuration for this solution.

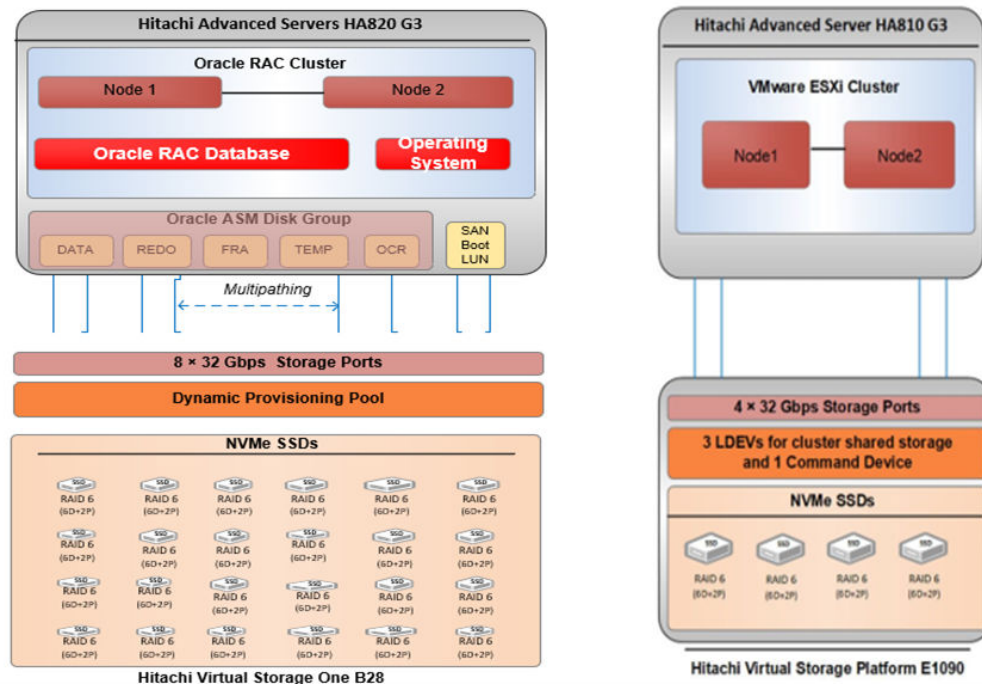

The following table shows the VSP One Block 28 storage pool configuration used for this solution.

Pool ID	Oracle RAC-Pool
Pool Type	Dynamic Provisioning Pool
RAID Group	1-1
RAID Level	RAID 6 (6D+2P+1 Spare)
Drive Type	3.8 TB NVMe SSD
Number of Drives	24
LDEV Size	3.8 TB
Pool Capacity	68 TB

In this Solution we used RAID 6 (6D+2P+1Spare) configuration for the storage systems with 24 NVMe SSDs with a single DDP pool. Each SSD Drive capacity is 3.8 TB with DDP enabled, with a total usable capacity of 68 TB.

The following table shows the VSP One Block 28 logical storage configuration used in this solution.

ASM disk group	Total number of dynamic provisioning volumes	Dynamic provisioning volume sizes (GB)	Purpose	Storage Ports
DATA	14	200 GB	OLTP Application Tablespaces, System Sysaux, Undo	2D, 8D, 1A, 3A, 7A, 5A, 4D, 6D
REDO	6	20 GB	Online Redo Logs and Control Files	
TEMP	3	200 GB	Temp Tablespace	
OCR	3	20 GB	Oracle Cluster Registry and Voting Disk	

The following table shows the VSP E1090 configuration for management servers.

Item	Value/Description
Purpose	VMware Datastores CCI device
RAID Level	RAID 6 (6D+2P)
Drive Type	1.9 TB NVMe SSD
Number of Drives	48
Number of Pool LDEVs	4
LDEV Size	3× 1000 GB
Number and Size of CCI Devices	1× 100 MB
Storage Port for Management Servers	7A, 7B, 8A, 8B

Additional LUNs can be mapped if required. While the test environment was configured using a dedicated SAS RAID group for the management server cluster, this can be configured as a dedicated SSD RAID group, a dedicated dynamic provisioning pool, and capacity on the dynamic provisioning pool configured for the Oracle environment.

## Database layout

The database layout design uses recommended practices from Hitachi Vantara for Hitachi Virtual Storage Platform One Block 28 for small random I/O traffic, such as OLTP transactions. The layout also considers Oracle ASM best practices when using Hitachi Vantara storage.

Base the storage design for database layout needs on the requirements of the specific application implementation. The design can vary greatly from one implementation to another, based on the RAID configuration type and number of drives used in the implementation.

The components in this solution have the flexibility to be used in various deployment scenarios to provide the right balance between performance and ease of management for a given scenario.

## Oracle ASM configurations

- Data and Indexes Tablespace — Assign an ASM disk group with external redundancy for the data and index tablespaces.
- TEMP Tablespace — Place the TEMP tablespace in this configuration in the TEMP ASM disk group.
- Online Redo Logs — Create an ASM disk group with external redundancy for Oracle online redo logs.
- Oracle Cluster Registry and Voting Disk — Create an ASM disk group with normal redundancy to contain the OCR and voting disks and to protect against single disk failure to avoid loss of cluster availability. Place each of these files in this configuration in the OCR ASM disk groups.

## Oracle initial parameters

The following table lists the Oracle Database settings.

Environment	Value
RAC	Yes
ASM	Yes – to support Oracle RAC Database

## Oracle ASM disk mappings

The following table lists the details of the disk mappings from the LUNs to the ASM disk groups for Oracle Database tablespaces for the 1 TB database size. This is an example with a single instance database virtual machine. Adjust parameters accordingly when multiple virtual machine pairs are used.

ASM Disk Group	ASM Disk	UDEV Rules	LUN Details	Purpose
N/A	N/A	/dev/xvd[a]1	1 × 350 GB	OS and Oracle Database
OCR	OCR1-OCR3	/dev/xvd[b-d]1	3 × 20 GB	Oracle cluster registry and voting disk
DATA1	DATA1-DATA14	/dev/xvd[e-r]1	14 × 200 GB	Application data
REDO	REDO01-REDO06	/dev/xvd[s-x]1	6 × 20 GB	Online REDO log group
TEMP	TEMP1-TEMP3	/dev/xvd[y-z]1	3 × 200 GB	Temporary Tablespace

## Server and application architecture

This reference architecture uses two Hitachi Advanced Server HA820 G3 servers with 4th Generation Intel Xeon Scalable Processors for each storage system architecture that was tested.

This provides the compute power for the Oracle database to manage complex database queries and a large volume of transaction processing in parallel.

The following table lists the details of the server configurations for this solution.

Server Make and Model	Server Host Name	Role	CPU Type	CPU Core	RAM
Hitachi Advanced Server HA820 G3	KVM server-01	Oracle Linux KVM Hypervisor Host (Version 4.0) (KVM host1)	2 × Intel Xeon Platinum 8470 52C CPUs	208 (2 × 2 52)	1024 GB (32 GB × 32)
Hitachi Advanced Server HA820 G3	KVM server-02	Oracle Linux KVM Hypervisor Host (Version 7.2.0) (KVM host2)	2 × Intel Xeon Platinum 8470 52C CPUs	208 (2 × 2 × 52)	1024 GB (32 GB × 32)
KVM VMs	VM1	Oracle Linux KVM VM for Oracle RAC Node 1	2 × Intel Xeon Platinum 8470	100 vCPU	200 GB

Server Make and Model	Server Host Name	Role	CPU Type	CPU Core	RAM
KVM VMs	VM2	Oracle Linux KVM VM for Oracle RAC Node 2	2 × Intel Xeon Platinum 8470	100 vCPU	200GB

## SAN architecture

Map the provisioned LDEVs to multiple ports on Hitachi Virtual Storage Platform One Block 28. These LDEV port assignments provide multiple paths to the storage system from the host for high availability. This reference architecture uses two dual port SN1610E HBAs per Hitachi Advanced Server HA820 G3.

Compute servers

- 8 SAN switch connections are used for Hitachi Virtual Storage Platform One Block 28 Fibre Channel ports.
- 8 SAN switch connections are used for server HBA ports.

Management servers

- 4 SAN switch connections are used for VSP E1090 Fibre Channel ports.
- 4 SAN switch connections are used for management server HBA ports.

The following table lists details of the Fibre Channel switch connect configuration on Hitachi Virtual Storage Platform One Block 28.

Server	HBA	HBA Port Alias	Switch Zone	Storage System	Storage Port	Brocade G720 Switch
HA820 G3 Server 1	HBA1	CN31_HBA1_1	CN31_HBA1_1_ASE44_204_2D	VSP One Block 28	2D	12(SW1)
	HBA1	CN31_HBA1_2	CN31_HBA1_2_ASE44_204_8D		8D	12(SW2)
	HBA2	CN31_HBA2_1	CN31_HBA2_1_ASE44_204_1A		1A	13(SW1)
	HBA2	CN31_HBA2_2	CN31_HBA2_2_ASE44_204_3A		3A	13(SW2)
HA820 G3 Server 2	HBA1	CN32_HBA1_1	CN32_HBA1_1_ASE44_204_7A	VSP One Block 28	7A	14(SW1)
	HBA1	CN32_HBA1_2	CN32_HBA1_2_ASE44_204_5A		5A	14(SW2)
	HBA2	CN32_HBA2_1	CN32_HBA2_1_ASE44_204_4D		4D	15(SW1)
	HBA2	CN32_HBA2_2	CN32_HBA2_2_ASE44_204_6D		6D	15(SW2)

Server	HBA	HBA Port Alias	Switch Zone	Storage System	Storage Port	Brocade G720 Switch
HA810 G3 Server 1	HBA1	MN33_HBA1_1	MN33_HBA1_1_ASE44_204_1A	VSP E1090	1A	29
	HBA1	MN33_HBA1_2	MN33_HBA1_2_ASE44_204_3A		3A	30
HA810 G3 Server 2	HBA1	MN34_HBA1_1	MN34_HBA1_1_ASE44_204_2A		2A	29
	HBA1	MN34_HBA1_2	MN34_HBA1_2_ASE44_204_4A		4A	30



**Note:** In a production environment, it is recommended to use separate storage ports for the management servers to avoid impact on database performance. Shared storage ports can be used; however, port utilization should be monitored to avoid performance issues in high performance environments.

## Network architecture

Do the following when configuring networks in your environment:

- Use NIC bonding to provide failover and load balancing of interconnections within a server.
- Set all NICs to full duplex mode.

Configure each Oracle KVM server node with at least the bonding interfaces for the following:


- Management network
- Public network
- Private network

Each virtual machine has public, private, and management vNICs. Use separate VLANs for the following:

- Oracle KVM management network
- Private Oracle database network
- Public network

## Physical network configuration

The following figure shows the IP network switch connection.

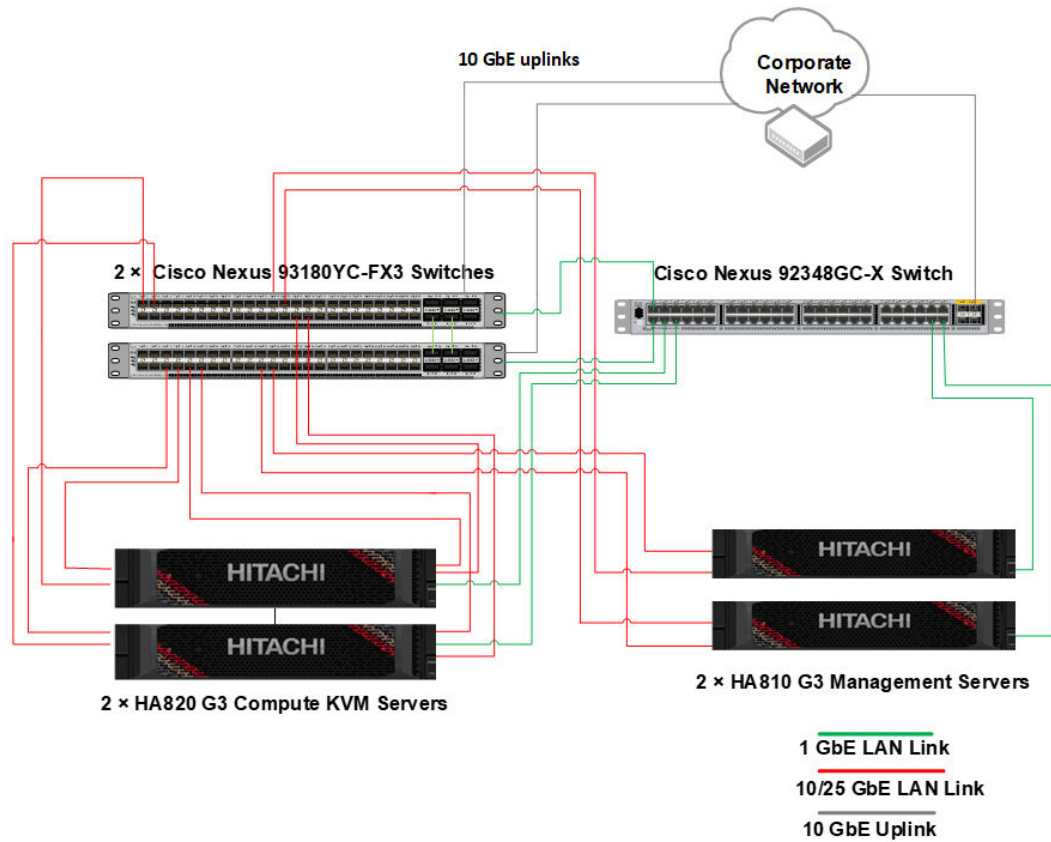

The following table lists the HA820 G3 and HA810 G3 network configuration for this solution.

Server	NIC Ports	VLAN/ Sub-net	NIC BOND	IP Address	NW	BW Gbps	Cisco 93180YC-FX3 Switch	
							Switch #	Port
HA820 G3 Server 1	NIC - 1	1	Bond1	192.168.1.X	Private	10/25	1	32
	NIC - 3					10/25	1	33
	NIC - 0	33	Bond0	10.76.33.X	Public	10/25	1	31
	NIC - 2					10/25	1	34
	iLO-Dedicated NIC	28	-	10.76.28.X	Private Mgmt	1	-	
HA820 G3 Server 2	NIC - 1	1	Bond1	192.168.1.X	Private	10/25	1	47 37
	NIC - 3					10/25	1	
	NIC - 0	33	Bond0	10.76.33.X	Public	10/25	1	29
	NIC - 2					10/25	1	38



Server	NIC Ports	VLAN/ Sub-net	NIC BOND	IP Address	NW	BW Gbps	Cisco 93180YC- FX3 Switch	
							Switch #	Port
	iLO- Dedicated NIC	28	-	10.76.28.X	Private Mgmt	1	-	
HA810 G3 Mgmt Server 1	NIC - 0	242	-	192.168.242 .X	Public	10	1	49
	ILO- dedicated NIC	244	-	192.168.244 .20	Public Mgmt	1	-	
HA810 G3 Mgmt Server 2	NIC - 0	242	-	192.168.242 .21	Public	10	1	50
	ILO- dedicated NIC	244	-	192.168.244 .21	Public Mgmt	1		



**Note:** When creating NIC bonding pairs, ports should be used on different cards to avoid single points of failure (SPoF).

The following table lists the network configuration for servers and VSP One Block 28.

Name	IP Address
Oracle Linux KVM host 1	10.76.28.xx
Oracle Linux KVM host 2	10.76.28.xx
Management Server 1	10.76. 247.xx
Management Server 2	10.76. 247.xx
VSP One Block 28	172.25.45.xx
VSP One Block 28 CTL1	172.25.45.xx
VSP One Block 28 CTL2	172.25.45 xx

The following table lists the network configuration for the switches in this solution.

Switch Type	Model	Switch Name	IP Address for MGMT port
Cisco 1 GbE Management Network Switch	Cisco Nexus C92348GC-X	C92348GC-X -1	10.76.28.xx
Cisco 10G/25 GbE Network Switch	Cisco Nexus N9K-C93180YC-FX3	Cisco C93180YC-FX3-2	10.76.28.xx
Brocade Fibre Channel SAN Switch	G720	SAN-switch 1	10.76.28. xx
Brocade Fibre Channel SAN Switch	G720	SAN-switch 2	10.76.28.xx

## Engineering validation

This section summarizes the key lab verification tests performed on the Hitachi Integrated Systems solution with Oracle RAC Database virtualized on Oracle Linux KVM hypervisor using Hitachi Virtual Storage Platform One Block 28 and Hitachi Advanced Server HA820 G3.

### Database configuration

The following table lists parameter details for a two-node Oracle ASM database.

Oracle Database Parameter	Value
Compatible	19.19.0.0.0
Oracle Database size	1 TB
Database storage type	ASM
Database fill factor	70%

### Test environment

The following table lists configuration details for VSP One Block 28 testing.

Item	Value
Operating System on KVM VMs	OL 8.6
Workload Type	OLTP/OLAP
Database Size	1 TB

Item	Value
Number of vCPUs	100
Virtual Memory	250 Gb per VM
Host Cluster VM Network	2 × 25 Gbps NIC Bonding

### Test methodology

The test results are demonstrated using peakmarks OLTP test cases.

[peakmarks](#) is benchmark software for Oracle platforms. It was used in our tests for the following:

- Performance verification (quality assurance)
- Evaluation of different infrastructure products, technologies, and solutions (price/performance comparison)
- Performance optimization (improvement in efficiency)

This provides transparency and comparability in price versus performance considerations for Oracle infrastructures. The peakmarks 9.6 tool was used to validate this solution.



**Note:** Peakmark tests conducted on VMs were configured as “Server Class VM” on Oracle Linux KVM Hypervisor.

## Conclusion

Hitachi Virtual Storage Platform One Block 28 and Hitachi Advanced Server HA820 G3 have been tested and validated as an ideal platform for virtualized workloads. This solution was tested on Oracle RAC database as well as with multiple environments running at the same time.



**Note:** For peakmarks performance results contact your sales representative.

## Product descriptions

These products are used in this reference architecture.

### Hitachi Integrated Systems Platform

The Hitachi Integrated Systems platform is a high-performance, low-latency, integrated, converged solution using Hitachi Virtual Storage Platform One Block storage, Hitachi Advanced Server HA820 G3, as well as HA810 G3 with Sapphire Rapids Scalable Processors.

## Hitachi Virtual Storage Platform One Block

The Hitachi Virtual Storage Platform One Block series simplifies system setup and management through Hitachi Clear Sight and VSP One Block Administrator. Dynamic Drive Protection reduces RAID complexity, and always-on compression and deduplication enhance simplicity.

Dynamic Carbon Reduction optimizes energy usage by switching CPUs to ECO mode during low activity. Adaptive Data Reduction (ADR) is always on, enhancing efficiency and reducing the overall CO2 footprint.

Thin Image Advanced (TIA) integrates with major snapshot ecosystems, prioritizing security by defending against threats and ensuring data confidentiality. CyberArk Privileged Access Manager plugins enhance block storage system security by prioritizing data confidentiality, ensuring compliance, and actively defending against security threats.

Hitachi Virtual Storage Platform One Block 20 includes 3 dedicated models. All have the same capacity (72 NVMe flash drives, the appliance and 2 × media trays) and they support Fibre Channel, iSCSI, and NVMe TCP connectivity. The new capabilities remove complexity: data reduction is always on, Dynamic Drive Protection removes complicated RAID setup, and Dynamic Carbon Reduction delivers real world reduction in power consumption. In addition, the models are FIPS compliant.

- VSP One Block 24 – 256 GB Cache + SW Advanced Data Reduction (ADR) + 24 cores
- VSP One Block 26 – 768GB Cache + 2x Compression Accelerator Module (CAM) + 24 cores
- VSP One Block 28 – 1TB Cache + 4x CAM + 64 cores

In short, the Hitachi Virtual Storage Platform One Block series combines simplicity, sustainability, and robust security features to optimize system management, energy efficiency, and data protection.

## Hitachi Storage Virtualization Operating System RF

Hitachi Storage Virtualization Operating System RF powers the Hitachi Virtual Storage Platform (VSP) family. It integrates storage system software to provide system element management and advanced storage system functions. Used across multiple platforms, Storage Virtualization Operating System includes storage virtualization, thin provisioning, storage service level controls, dynamic provisioning, and performance instrumentation.

Flash performance is optimized with a patented flash-aware I/O stack, which accelerates data access. Adaptive inline data reduction increases storage efficiency while enabling a balance of data efficiency and application performance. Industry-leading storage virtualization allows SVOS RF to use third-party all-flash and hybrid arrays as storage capacity, consolidating resources for a higher ROI and providing a high-speed front end to slower, less-predictable arrays.

See <https://www.hitachivantara.com/en-us/products/storage-platforms/storage-software> for more information.

## Hitachi Advanced Server HA810 G3

The compact 1U [Hitachi Advanced Server HA810 G3](#) delivers enhanced performance with the right balance of expandability and density. Designed for supreme versatility and resiliency while backed by a comprehensive warranty, the Hitachi Advanced Server HA810 G3 is ideal for IT infrastructure, either physical, virtual, or containerized.

The Hitachi Advanced Server HA810 G3 supports the 4th Generation Intel® Xeon® Scalable Processors with up to 60 cores, plus 4800 MT/s DDR5 Smart Memory up to 4.0 TB per socket. Introducing PCIe Gen5 and Intel® Software Guard Extensions (SGX) support on the dual-socket segment, the Hitachi Advanced Server HA810 G3 complements the Gen10 Plus reach by delivering premium compute, memory, networking communication, discrete graphic, I/O, and security capabilities for customers focused on performance at any cost.

HA810 G3 server is an excellent choice of daily business and workloads in General Compute, Database Management, Virtual Desktop Infrastructure, Content Delivery Network, Edge Acceleration, and Intelligent Video Analytics.

## Hitachi Advanced Server HA820 G3

Hitachi Advanced Server HA820 G3 is a high-performance two-socket rackmount server designed for optimal performance and power efficiency. This allows owners to upgrade computing performance without overextending power consumption and offers non-latency support to environments that require the maximum memory capacity. Hitachi Advanced Server HA820 G3 provides flexible I/O scalability for today's diverse data center application requirements.

Optimized for performance, high density, and power efficiency in a dual-processor server, [HA820 G3](#) delivers a balance of compute and storage capacity. These rack mounted servers have the flexibility to power a wide range of solutions and applications.

The highly scalable memory supports up to 8 TB RAM using 32 slots of 2300 MHz DDR5 RDIMM. HA820 G3 is powered by the Intel Xeon Emerald Rapids scalable processor family for complex and demanding workloads. Flexible OCP and PCIe I/O expansion card options are available.

## Oracle Linux KVM (OL-KVM)

Oracle Linux KVM is a feature of Oracle Linux. With the Unbreakable Enterprise Kernel (UEK) Release 6, the Oracle Linux server virtualization solution with KVM has been enhanced. Users can take either a previously deployed version of Oracle Linux and turn the OS into a KVM host, or a KVM configuration can be set up from a base Oracle Linux installation. Oracle Linux KVM is the same hypervisor used in Oracle Cloud Infrastructure, giving users an easy migration path to move workloads into Oracle Cloud.

There are two types of VMs configured for Hitachi solutions for Oracle database namely VMs optimized for *Server class* and VMs optimized for *High Performance VMs*.

With *High Performance VMs* we can configure a virtual machine for high performance, so that it runs with performance metrics as close to bare metal as possible. When you choose high performance optimization, the virtual machine is configured with a set of automatic and recommended manual settings for maximum efficiency.

- The high-performance option is supported by Red Hat Virtualization 4.2 and later
- To change the optimization mode of a new or existing virtual machine to high performance, we may need to make manual changes to the cluster and to the pinned host configuration first.

## Oracle Linux

[Oracle Linux](#) (OL, formerly known as Oracle Enterprise Linux) is a Linux distribution packaged and freely distributed by Oracle, available partially under the GNU General Public License. It is compiled from Red Hat Enterprise Linux source code, replacing Red Hat branding with Oracle branding.

## Oracle Database with Real Application Clusters Option

[Oracle Database](#) has a multi-tenant architecture used to consolidate many databases quickly and manage them as a cloud service. Oracle Database also includes in-memory data processing capabilities for analytical performance. Additional database innovations deliver efficiency, performance, security, and availability. Oracle Database comes in two editions: Enterprise Edition and Standard Edition 2.

[Oracle Real Application Clusters](#) (Oracle RAC) is a clustered version of Oracle Database. It is based on a comprehensive high-availability stack that can be used as the foundation of a database cloud system, as well as a shared infrastructure. This ensures high availability, scalability, and agility for any application.

[Oracle Automatic Storage Management](#) (Oracle ASM) is a volume manager and file system for Oracle database files. This supports both single-instance Oracle Database and Oracle Real Application Clusters configurations. Oracle ASM is the recommended storage management solution that provides an alternative to conventional volume managers, file systems, and raw devices.

## VMware ESXi

[VMware ESXi](#) is a foundation for the virtual infrastructure used for the management applications in this architecture. This allows the environment to operate independently from any general-purpose operating system, offering security, reliability, and simplified management.

## VMware vCenter Server Appliance

The [VMware vCenter Server Appliance](#) is a preconfigured Linux virtual machine, which is optimized for running VMware vCenter Server and the associated services on Linux.

vCenter Server Appliance is an Open Virtualization Format (OVF) template. The appliance is imported to an ESXi host and configured through the web-based interface. It comes pre-installed with all the components needed to run a vCenter Server. These include vCenter SSO (Single Sign-on), Inventory Service, vSphere Web Client, and the vCenter Server itself.

## Brocade switches from Broadcom

Brocade and Hitachi Vantara have partnered to deliver storage networking and data center solutions. These solutions reduce complexity and cost, as well as enable virtualization and cloud computing to increase business agility.

Brocade Fibre Channel switches deliver industry-leading performance with seventh generation 64Gb/sec Fibre Channel interfaces, simplifying scale-out network architectures. Get the high-performance, availability, ease of management, and support for the next generation of Hitachi Virtual Storage Platform storage systems on a solid storage network foundation that can grow as your need grows.

See <https://www.broadcom.com/products/fibre-channel-networking/switches> for more information.

## Cisco Nexus switches

The Cisco Nexus switch product line offers a range of solutions that simplify the connection and management of disparate data center resources through software-defined networking (SDN). Leveraging the Cisco Unified Fabric, which unifies storage, data, and networking (Ethernet/IP) services, the Nexus switches create an open, programmable network foundation built to support a virtualized data center environment.

## Peakmarks

Test results are demonstrated using peakmarks OLTP test cases.

Peakmarks is benchmark software for Oracle platforms. It is used in our tests for the purposes of:

- Performance verification (quality assurance).
- Evaluation of different infrastructure products, technologies, and solutions (price/performance comparison).
- Performance optimization (efficiency)

This provides transparency and comparability in price versus performance considerations for Oracle infrastructure solutions.

## Hitachi Vantara

Corporate Headquarters  
2535 Augustine Drive  
Santa Clara, CA 95054 USA



[HitachiVantara.com/contact](https://HitachiVantara.com/contact)