

Hitachi Solution for the SAP HANA Platform in a Scale-up Configuration using Hitachi Advanced Server DS220 with Intel Xeon Platinum 8276 or 8280 Base, Medium or Large Processors

Reference Architecture Guide

© 2023 Hitachi Vantara LLC. All rights reserved.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including copying and recording, or stored in a database or retrieval system for commercial purposes without the express written permission of Hitachi, Ltd., or Hitachi Vantara LLC (collectively "Hitachi"). Licensee may make copies of the Materials provided that any such copy is: (i) created as an essential step in utilization of the Software as licensed and is used in no other manner; or (ii) used for archival purposes. Licensee may not make any other copies of the Materials. "Materials" mean text, data, photographs, graphics, audio, video and documents.

Hitachi reserves the right to make changes to this Material at any time without notice and assumes no responsibility for its use. The Materials contain the most current information available at the time of publication.

Some of the features described in the Materials might not be currently available. Refer to the most recent product announcement for information about feature and product availability, or contact Hitachi Vantara LLC at https://support.hitachivantara.com/en_us/contact-us.html.

Notice: Hitachi products and services can be ordered only under the terms and conditions of the applicable Hitachi agreements. The use of Hitachi products is governed by the terms of your agreements with Hitachi Vantara LLC.

By using this software, you agree that you are responsible for:

1. Acquiring the relevant consents as may be required under local privacy laws or otherwise from authorized employees and other individuals; and
2. Verifying that your data continues to be held, retrieved, deleted, or otherwise processed in accordance with relevant laws.

Notice on Export Controls. The technical data and technology inherent in this Document may be subject to U.S. export control laws, including the U.S. Export Administration Act and its associated regulations, and may be subject to export or import regulations in other countries. Reader agrees to comply strictly with all such regulations and acknowledges that Reader has the responsibility to obtain licenses to export, re-export, or import the Document and any Compliant Products.

Hitachi and Lumada are trademarks or registered trademarks of Hitachi, Ltd., in the United States and other countries.

AIX, AS/400e, DB2, Domino, DS6000, DS8000, Enterprise Storage Server, eServer, FICON, FlashCopy, GDPS, HyperSwap, IBM, Lotus, MVS, OS/390, PowerHA, PowerPC, RS/6000, S/390, System z9, System z10, Tivoli, z/OS, z9, z10, z13, z14, z15, z16, z/VM, and z/VSE are registered trademarks or trademarks of International Business Machines Corporation.

Active Directory, ActiveX, Bing, Excel, Hyper-V, Internet Explorer, the Internet Explorer logo, Microsoft, Microsoft Edge, the Microsoft corporate logo, the Microsoft Edge logo, MS-DOS, Outlook, PowerPoint, SharePoint, Silverlight, SmartScreen, SQL Server, Visual Basic, Visual C++, Visual Studio, Windows, the Windows logo, Windows Azure, Windows PowerShell, Windows Server, the Windows start button, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation. Microsoft product screen shots are reprinted with permission from Microsoft Corporation.

All other trademarks, service marks, and company names in this document or website are properties of their respective owners.

Copyright and license information for third-party and open source software used in Hitachi Vantara products can be found in the product documentation, at <https://www.hitachivantara.com/en-us/company/legal.html> or https://knowledge.hitachivantara.com/Documents/Open_Source_Software.

Feedback

Hitachi Vantara welcomes your feedback. Please share your thoughts by sending an email message to SolutionLab@HitachiVantara.com. To assist the routing of this message, use the paper number in the subject and the title of this white paper in the text.

Revision history

Revision	Changes	Date
MK-SL-151-09	<ul style="list-style-type: none">▪ Add support for RHEL 8.8▪ Add support for SLES 15 SP5	December 8, 2023
MK-SL-151-08	<ul style="list-style-type: none">▪ Add support for RHEL 8.6▪ Add support for SLES 15 SP4	February 21, 2023
MK-SL-151-07	<ul style="list-style-type: none">▪ Add support for RHEL 8.4▪ Add support for SLES 15 SP3	March 16, 2022

Reference Architecture Guide

Use this scale-up environment for Hitachi Solution for the SAP HANA platform to transform your business to boost innovation, growth, and profits. This solution uses Hitachi Advanced Server DS220 and either of the following:

- Internal server storage in an appliance configuration
- External disks in a storage subsystem following the tailored data center integration (TDI) approach to implement SAP HANA

This SAP HANA infrastructure uses the following components:


- Hardware
 - One Hitachi Advanced Server DS220 with internal drives
 - (Optional) An external storage subsystem, such as Hitachi Virtual Storage Platform G350 or Virtual Storage Platform F350
- Software
 - Preconfigured with SAP HANA to provide a converged solution for applications using SAP HANA

The validation of this environment was done with both of the following:


- Internal drives in an appliance configuration
- External storage with Hitachi Virtual Storage Platform G350 for a tailored data center integration

Your needs might require other storage options. Contact your account representative from Hitachi Vantara for details and implementation services.

The following figure shows the topology of this reference solution using internal drives on Hitachi Advanced Server DS220.

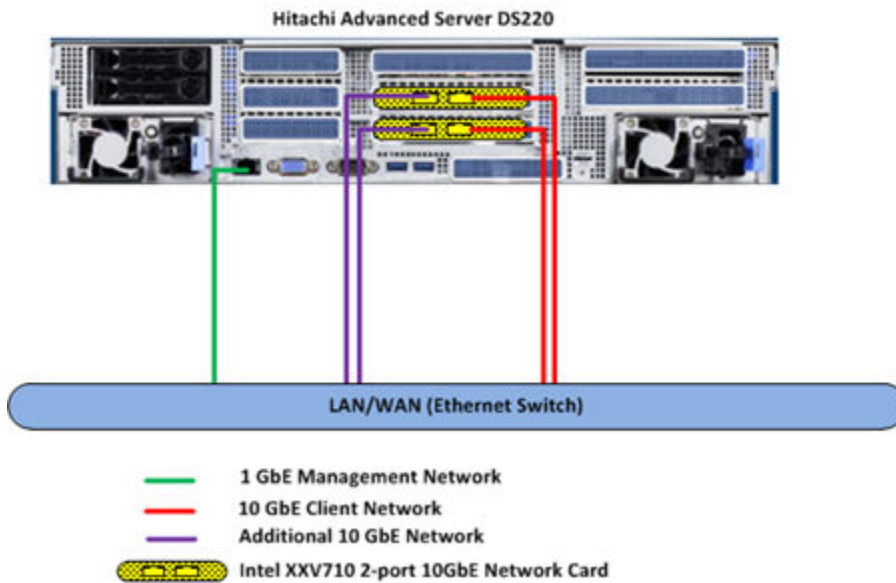

The following figure shows the topology of this reference solution using external drives on a storage subsystem, such as Hitachi Virtual Storage Platform F350 or Virtual Storage Platform G350.

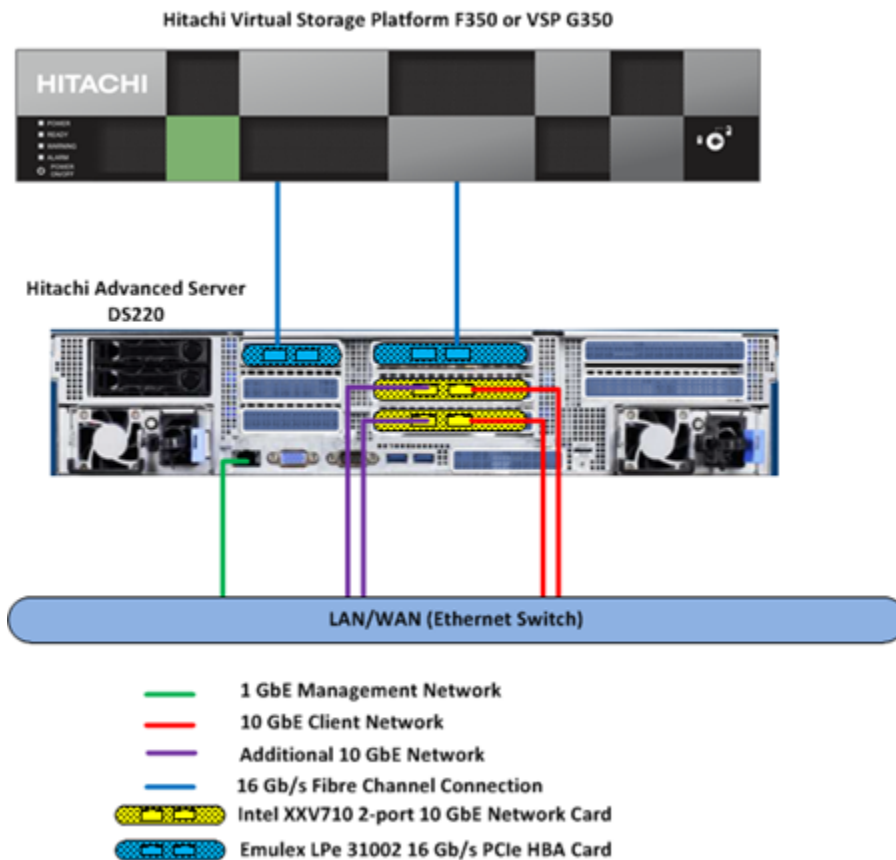

Hitachi Solution for SAP HANA is a preconfigured converged system for any business workload running on SAP HANA. It is ready to plug into your network to host business data, deliver data-driven insights throughout your business, and predict real-time outcomes.

This system supports the configurations listed in the following table.

Table 1 Supported Configuration

Number of Sockets	RAM Size	Storage
2 Intel Xeon Platinum 8276, 8276M, 8276L, 8280, 8280M, or 8280L processors 28-core, 2.2 GHz	<ul style="list-style-type: none"> ▪ 384 GB with 12 × 32 GB 2933 RDIMM-DR ▪ 768 GB with 24 × 32 GB 2933 RDIMM-DR ▪ 768 GB with 12 × 64 GB 2933 RDIMM-DR ▪ 1536 GB with 24 × 64 GB 2933 RDIMM-DR 	Internal storage option: <ul style="list-style-type: none"> ▪ Internal drives on Hitachi Advanced Server DS220 External storage option: <ul style="list-style-type: none"> ▪ Storage subsystem, such as Hitachi Virtual Storage Platform G350 or VSP F350
2 Intel Xeon Platinum 8276L, 8280M, 8280L processors 28-core, 2.7 GHz	<ul style="list-style-type: none"> ▪ 1536 GB with 12 × 128 GB 2933 LRDIMM-QR ▪ 3072 GB with 24 × 128 GB 2933 LRDIMM-QR 	

This technical paper assumes that you have familiarity with the following:

- Storage area network (SAN) based storage systems
- General storage concepts
- Common IT storage practices
- SAP HANA



Note: Testing of this configuration was in a lab environment. Many things affect production environments beyond prediction or duplication in a lab environment. Follow the recommended practice of conducting proof-of-concept testing for acceptable results in a non-production, isolated test environment that otherwise matches your production environment before your production implementation of this solution.

Key solution elements

The following are the key hardware and software components used in this reference architecture. Detailed component information is provided in the [Product descriptions \(on page 19\)](#) section.



Note: Do not change the layout of any of the components in this environment without consulting your Hitachi Vantara account representative. Changing this layout can require manual configuration of the network and/or using different components.

Hardware elements

The following table lists the hardware used to deploy the specific scale-up configuration of Hitachi Solution for SAP HANA for the different sized solutions.

Hitachi Advanced Server DS220 has added storage drives, RAID card, and HBA card, based on whether you are implementing this solution with internal storage or an external storage sub-system, as indicated in the following table.

Table 2 Hardware Elements

Hardware	Quantity	Configuration	Role	Implementation Type
Hitachi Advanced Server DS220	1	<ul style="list-style-type: none"> ▪ CPU for each SAP HANA node: <ul style="list-style-type: none"> • 2 Intel Xeon Platinum 8276 Base/Medium*/Large Processor 28-core, 2.2 GHz, 152 W (or) • 2 Intel Xeon Platinum 8280 Base/Medium*/Large Processor 28-core, 2.70 GHz, 205 W ▪ 2 heat sinks CPU 0/1 <ul style="list-style-type: none"> • The RAM for each SAP HANA node is in Table 1 	SAP HANA server	All implementations
Intel PCIe network cards	2	<ul style="list-style-type: none"> ▪ Intel XXV710 dual port SFP28 (LP-MD2) PCIe card 	For SAP HANA 10 GbE client network and additional 10 GbE network	All implementations
	2	<ul style="list-style-type: none"> ▪ Cisco SFP+ 3M Twinaxial cables 		
Hitachi Virtual Storage Platform	1	<ul style="list-style-type: none"> ▪ Single frame 	Block storage when using an external storage sub-system	External storage only

Hardware	Quantity	Configuration	Role	Implementation Type
G350 or VSP F350				
Broadcom PCIe HBA card	2	▪ 2-port LPE31002-M6 16 Gb/s card	Connectivity to the external storage subsystem	External storage only
	2	▪ 16 Gb/s SFP		
RAID controller card (SAS mezzanine)	1	▪ AVAGO MegaRAID SAS PCIe ROMB-QS-3516B controller card	Required on the Hitachi Advanced Server DS220, when using internal storage	Internal storage only
Storage drives	5	▪ 1.92 TB Intel S4510 SATA SSD	Supports less than or equal to 1536 GB RAM per HANA node.	Internal storage only
	9		Supports greater than or equal to 1536 GB RAM per HANA node	
	1		Spare drive	
Cisco Nexus 92348 or 3048 switch	1	▪ 48 × 1 GbE ports	Optional switch for management network	All implementations (optional)
Cisco Nexus 93180YC-FX or 93180YC-EX switch	2	▪ 48 × 10 GbE ports	Optional switches for things such as the client network or additional backup network	All implementations (optional)
Minkel Global Solutions Rack	1	▪ 1 standard rack	Optional rack for mounting server	All implementations
PDUs	6	▪ Vertical PDUs	Optional PDUs for solution	All implementations
*According to the <i>Intel PCN 117365-00</i> , the discontinuance of the M series began on January 15, 2020.				

Software elements

The following table describes the software products used to deploy this solution.

Table 3 Software Elements

Software	
Operating system	SUSE Linux Enterprise Server for SAP Applications
	Red Hat Enterprise Linux (alternate)
Database	SAP HANA 2.0 SPS 06 or later

Solution design

The detailed design for this scale-up configuration of Hitachi Solution for the SAP HANA Platform for this reference solution includes the following:

- Hitachi Advanced Server DS220 Configuration
- Network Architecture
- Storage Architecture Configuration
- SAP HANA Configuration

Hitachi Advanced Server DS220 Configuration


The following figure shows the front and back view of Hitachi Advanced Server DS220 when using internal drives.




Hitachi Advanced Server DS220 (Front)




Hitachi Advanced Server DS220 with internal drives - PCIe Slots used

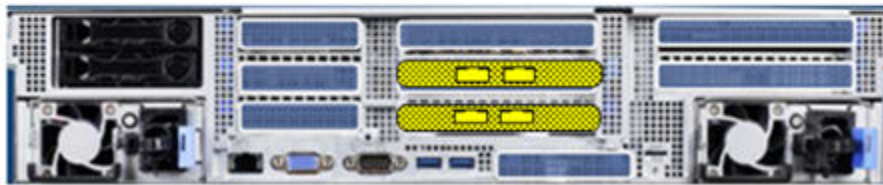

Hitachi Advanced Server DS220 with internal drives (Back)

 Intel XXV710 2-port 10 GbE Network Card


The following figure shows the back view of the Hitachi Advanced Server DS220 when using external drives on a storage system, such as Hitachi Virtual Storage Platform G350 or Virtual Storage Platform F350. Front view is the same as in the earlier figure but without any internal drives.

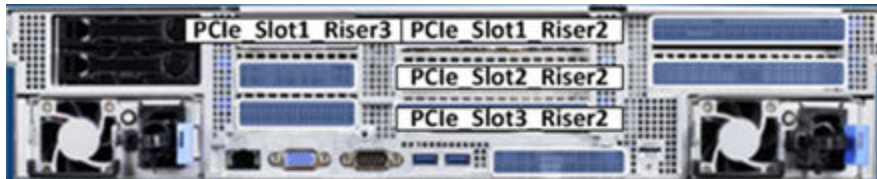


Hitachi Advanced Server DS220 with external storage PCIe slots Used (Back)



Hitachi Advanced Server DS220 with external Storage (Back)

 Intel XXV710 2-port 10 GbE Network Card

 Emulex LPe 31002 16 Gb/s PCIe HBA Card

This solution uses one Hitachi Advanced Server DS220 with the following components:

- 2 × 2-port 10 GbE Intel XXV710 SFP28 PCIe card on the PCIe_SLOT2_Riser2 and PCIe_SLOT3_Riser2
- Required only with the internal storage option:
 - 1 AVAGO MegaRAID SAS PCIe ROMB-QS-3516B controller card on Riser Slot 4
 - 5 × 1.92 TB Intel S4510 SATA SSD drives on the front bay, supporting less than or equal to 1536 GB RAM per SAP HANA node
 - 9 × 1.92 TB Intel S4510 SATA SSD on the front bay, supporting greater than 1536 GB RAM per SAP HANA node
 - 1 × 1.92 TB Intel S4510 SATA SSD drives used as spare drive
- Required only with the external storage option:
 - 2 × 2-port Broadcom LPE31002-M6 16 Gb/s PCIe HBA card on PCIe_SLOT1_Riser2 and PCIe_SLOT1_Riser3

Network architecture configuration

Connect the 1 GbE management port on Hitachi Advanced Server DS220 to a Cisco Nexus 92348 or 3048 switch, or to any other external 1 GbE switch for management connectivity.

Make the following 10 GbE network connections for the client network setup of the SAP HANA node as an uplink network in the following table:

- Connect the following to Cisco Nexus 93180YC-FX or 93180YC-EX switches or to any other external switches:
 - Port 0 of the 10 GbE Intel XXV710 SFP28 PCIe card to the two different Cisco Nexus 93180YC-FX or 93180YC-EX switches
 - Bond the corresponding two ports eth9901 and eth9902 as bond0 at the operating system level using active-active network bond mode with the following options:


```
mode= 802.3ad miimon=100 xmit_hash_policy=layer3+4 lacp_rate=fast
```

This acts as the client network for the SAP HANA node.

- If additional 10 GbE network connections are required, connect the Port 1 of both the 10 GbE Intel XXV710 SFP28 PCIe cards to the Cisco Nexus 93180YC-FX or 93180YC-EX switches or to any other external switches.

Table 4 Network Setup

Network Card	Port	Network Description
PCIe_SLOT3_Riser2	0	Client network for the SAP HANA node (eth9901)
	1	Free for use as additional 10 GbE network for backup, SAP HANA system replication, or other purposes

Network Card	Port	Network Description
PCIe_SLOT2_Riser2	0	Client network for the SAP HANA node (eth9902)
	1	Free for use as additional 10 GbE network for backup, SAP HANA system replication, or other purposes



Note: The management network and client network can be on the same network switch or a separate network switch, depending on the network environment.

Storage architecture configuration

This describes the two storage configurations for this environment:

- Internal Storage
- External Storage Option

Internal storage option

These are the storage components needed to setup a scale-up configuration for SAP HANA using internal storage with Hitachi Advanced Server DS220:

- 1 AVAGO MegaRAID SAS PCIe ROMB-QS-3516B controller card
- 5 × 1.92 TB Intel S4510 SATA SSD drives configured as RAID-5 (4D+1P), supporting less than or equal to 1536 GB RAM per SAP HANA node including the spare drive
- 9 × 1.92 TB Intel S4510 SATA SSD drives configured as RAID-5 (8D+1P), supporting greater than 1536 GB RAM per SAP HANA node including the spare drive
- 1 × 1.92 TB Intel S4510 SATA SSD drives used as a spare drive

Storage sizing and configuration vary for the different sizes by considering requirements for I/O and capacity, including the following:

- Operating system volume (OS)
- SAP HANA shared volume (/hana/shared)
- SAP HANA log volume (/hana/log)
- SAP HANA data volume (/hana/data)

The following table lists the storage configurations for different memory sizes.

Table 5 Storage Configuration When Using Internal Storage

Configuration	Memory Less Than or Equal to 1.5 TB	Memory Greater Than 1.5 TB
Parity Group	<ul style="list-style-type: none"> 1 RAID-5 (4D+1P) parity group using 5 × 1.92 TB Intel S4510 SATA SSD 	<ul style="list-style-type: none"> 1 RAID-5 (8D+1P) parity group using 9 × 1.92 TB Intel S4510 SATA SSD
OS, Data, Log, and HANA Shared	<ul style="list-style-type: none"> Operating system volume: 100 GB SAP HANA shared volume: 1536 GB Data volume: 4915 GB Log volume: 600 GB 	<ul style="list-style-type: none"> Operating system volume: 100 GB SAP HANA shared volume: 3072 GB Data volume: 9830 GB Log volume: 600 GB
Spare drive	<ul style="list-style-type: none"> 1 × 1.92TB Intel S4510 SATA SSD 	

External storage option



Note: Each implementation of this reference architecture can use a different storage architecture. Validation testing for this environment used Hitachi Virtual Storage Platform G350 and Virtual Storage Platform F350 as external storage. Contact your account representative for details and implementation services when you want an environment using external storage.

These are the storage components you need to implement a scale-up SAP HANA system with Hitachi Advanced Server DS220 using external storage:

- 2 × 2-port Broadcom LPe31002-M6 16 Gb/s PCIe HBA card
- Storage drive box trays (DBS)
- Spare drives

In case of the external storage option with direct connection between Hitachi Virtual Storage Platform storage and the Emulex HBA on Hitachi Advanced Server DS220, the following are mandatory:

- Use System Mode 847 on the storage array.
- Enable Host Mode Option 02, Host Mode Option 94, and Host Mode Option 109 for the corresponding storage port connected with the server.
 - Host Mode Option 109 — This option fixes the SAN boot issue, where sometimes the system cannot find the Boot LUN after a reboot.
 - Host Mode Option 94 — This option is mandatory for direct connection between the Hitachi Virtual Storage Platform and the Emulex Lpe31002 HBA to work. Without setting up Host Mode Option 94, SAN storage cannot be identified from the Emulex HBA.
 - Host Mode Option 02 (Optional) — This option is recommended when the system uses test-unit-ready (TUR) for path_checker in the /etc/multipath.conf file. Also Host Mode Option 02 is typically used when “fencing” technology is used.
- Host Group ID must be 00 for SAN boot.

Also, an example configuration for port properties with Hitachi Virtual Storage Platform is in the following table.

Table 6 Example Port Properties on Hitachi Virtual Storage Platform

For this setting	Use this value
Port Security	Disabled
Port Speed	16 Gbps
Fabric	OFF
Connection Type	P-to-P

The SAP HANA node needs the following storage layout:

- Operating system volume
- SAP HANA shared volume for the SAP HANA binaries and other configuration files
- SAP HANA log volume
- SAP HANA data volume

This reference architecture uses a dynamic provisioning pool design for the storage layout. This ensures maximum utilization and optimization at a lower cost.

Use two dynamic provisioning pools with the specific parity groups listed in the following table for the storage layout.

Table 7 Dynamic Provisioning Pools

Dynamic Provisioning Pool Name	Purpose	Parity Group RAID Level and Disks
OS_SH_Data_Pool	Operating system LUN SAP HANA shared LUN Data LUN	RAID-10 (2D+2D) on 1.92 TB SSD drives
Log_Pool	Log LUN	RAID-10 (2D+2D) on 1.92 TB SSD drives

The example layout in the following table uses a dynamic provisioning pool layout on Hitachi Virtual Storage Platform G350 or Virtual Storage Platform F350 for a SAP HANA TDI solution for a 1.5 TB scale-up system.

Table 8 Dynamic Provisioning Pool for a SAP HANA TDI Solution

Dynamic Provisioning Pool	Parity Group ID	Parity Group RAID Level and Disks	LDEV ID	LDEV Name	LDEV Size (GB)	MPU Assignment
OS_SH_Data_Pool	1	RAID-10 (2D+2D) on 1.92 TB SSD drives	00:00:01	OS_SH_DA_Pool_1	878	MPU-10
			00:00:02	OS_SH_DA_Pool_2	878	MPU-20
			00:00:03	OS_SH_DA_Pool_3	878	MPU-10
			00:00:04	OS_SH_DA_Pool_4	878	MPU-20
Log_Pool	2	RAID-10 (2D+2D) on 1.92 TB SSD drives	00:01:01	Log_Pool_1	878	MPU-10
			00:01:02	Log_Pool_2	878	MPU-20
			00:01:03	Log_Pool_3	878	MPU-10
			00:01:04	Log_Pool_4	878	MPU-20

Provision the virtual volumes for the operating system, SAP HANA shared, data, and log volumes following table for a SAP HANA TDI solution for a 1.5 TB scale-up system.

Table 9 Virtual Volumes for the SAP HANA Nodes

Dynamic Provisioning Pool	Virtual Volume ID	Virtual Volume Name	Virtual Volume Size	MPU Assignment
OS_SH_Data_Pool	00:02:00	HANA_OS	100 GB	MPU-10
	00:02:01	HANA_SH	1024 GB	MPU-20
Log_Pool	00:02:02	HANA_LOG_1	128 GB	MPU-10
	00:02:03	HANA_LOG_2	128 GB	MPU-20
	00:02:04	HANA_LOG_3	128 GB	MPU-10
	00:02:05	HANA_LOG_4	128 GB	MPU-20
OS_SH_Data_Pool	00:02:06	HANA_DATA_1	384 GB	MPU-10
	00:02:07	HANA_DATA_2	384 GB	MPU-20
	00:02:08	HANA_DATA_3	384 GB	MPU-10
	00:02:09	HANA_DATA_4	384 GB	MPU-20

The following table has the LUN path assignment used when validating this environment.

Table 10 Example LUN Path Assignment

LUN ID	LDEV ID	LDEV Name
0000	00:02:00	HANA_OS
0001	00:02:01	HANA_SH
0002	00:02:02	HANA_LOG_1
0003	00:02:03	HANA_LOG_2
0004	00:02:04	HANA_LOG_3
0005	00:02:05	HANA_LOG_4
0006	00:02:06	HANA_DATA_1
0007	00:02:07	HANA_DATA_2
0008	00:02:08	HANA_DATA_3
0009	00:02:09	HANA_DATA_4

SAP HANA configuration

This describes how to configure SAP HANA in this solution.

File system

These volumes use the following file systems for the implementation of this solution either with internal drives or an external storage system:

- Operating system volume BTRFS filesystem (only for SLES)/XFS filesystem
- SAP HANA shared volume
- Data volume
- Log volume

Device-Mapper Multipath

If implementing this solution using internal storage on Hitachi Advanced Server DS220, deactivate Device-Mapper Multipath.

If implementing this solution using external storage, activate Device-Mapper Multipath.

SAP HANA software installation

After configuring the file system for the SAP HANA data volume and log volume, install the latest SAP HANA 2.0 SPS6 or higher on the server.

Install the following SAP HANA software components on the server:

- SAP HANA database server
- SAP HANA client
- SAP Host agent

Engineering validation

The test methodology for validating the appliance configuration using Hitachi Advanced Server DS220 with Intel S4510 SATA SSD drives and SAP HANA tailored datacenter integration (TDI) enterprise storage configuration with Hitachi Virtual Storage Platform F350/G350 used the following:

- SAP HANA Hardware Configuration Check Tool (HWCCT) using FSPERF revision hwcct-212_5 was tested on these volumes for SLES 12 SP4 and RHEL 7.6:
 - Data volume
 - Log volume
- Appliance configuration with Intel S4510 SATA SSD internal drive was tested using HWCCT 212_5, using the fsperf_single_mix_107.sh script for SLES 12 SP4 and RHEL 7.6:
 - MixedIO on Data/Log Volume (A MixedIO test is mandatory if the data volume and log volume are created in same parity group. Otherwise this test is optional.)

- For both the appliance or TDI solution, SAP HANA Hardware and Cloud Measurement Tool (HCMT) revision hcmt-046_0 was tested on these volumes for SLES 15 SP1:
 - Data volume
 - Log volume
- For both appliance or TDI solution, SAP HANA Hardware and Cloud Measurement Tool (HCMT) revision hcmt-047_0 was tested on these volumes for RHEL 8.1:
 - Data volume
 - Log volume
- For both appliance or TDI solution, SAP HANA Hardware and Cloud Measurement Tool (HCMT) revision hcmt-055_0 was tested on these volumes for RHEL 8.2 and SLES 15 SP2:
 - Data volume
 - Log volume
- For both appliance or TDI solution, SAP HANA Hardware and Cloud Measurement Tool (HCMT) revision hcmt-060_0 was tested on these volumes for RHEL 8.4 and SLES 15 SP3:
 - Data volume
 - Log volume
- For both appliance or TDI solution, SAP HANA Hardware and Cloud Measurement Tool (HCMT) revision hcmt-065_0 was tested on these volumes for RHEL 8.6 and SLES 15 SP4:
 - Data volume
 - Log volume
- For both appliance or TDI solution, SAP HANA Hardware and Cloud Measurement Tool (HCMT) revision hcmt-073_0 was tested on these volumes for RHEL 8.8 and SLES 15 SP5:
 - Data volume
 - Log volume
 - Shared volume

For optimal use of the system with a SAP HANA database, use the parameters listed in the corresponding appendix for your operating system release. Follow [SAP Note 2399079](#) to set up these parameters defined in global.ini for SAP HANA 2.0.

Sample global.ini files

These are sample global.ini files for the two different operating systems.

SUSE Enterprise Linux Server for SAP Applications

This is a sample *global.ini* file that was configured and used for validating the environment as an appliance solution or TDI solution with SUSE Linux Enterprise Server for SAP Applications 12 SP4, SUSE Linux Enterprise Server for SAP Applications 15 SP1, SUSE Linux Enterprise Server for SAP Applications 15 SP2, SUSE Linux Enterprise Server for SAP Applications 15 SP3, SUSE Linux Enterprise Server for SAP Applications 15 SP4, and SUSE Linux Enterprise Server for SAP Applications 15 SP5.

```
[communication]
tcp_backlog = 2048

[fileio]
max_parallel_io_requests[data] = 64
max_submit_batch_size[data] = 64
size_kernel_io_queue[data] = 512
async_read_submit[data] = on
async_write_submit_blocks[data] = all
min_submit_batch_size[data] = 16
async_write_submit_active[data] = auto
max_parallel_io_requests[log] = 64
max_submit_batch_size[log] = 64
size_kernel_io_queue[log] = 512
async_read_submit[log] = on
async_write_submit_blocks[log] = all
min_submit_batch_size[log] = 16
async_write_submit_active[log] = auto

[multidb]
mode = multidb
database_isolation = low
singletenant = yes

[persistence]
basepath_datavolumes = /hana/data/HIT
basepath_logvolumes = /hana/log/HIT
```

Red Hat Enterprise Linux

This is the sample *global.ini* file used when validating this solution with Red Hat Enterprise Linux 7.6, Red Hat Enterprise Linux 8.1, Red Hat Enterprise Linux 8.2, Red Hat Enterprise Linux 8.4, Red Hat Enterprise Linux 8.6, and Red Hat Enterprise Linux 8.8 as an appliance solution or TDI solution.

```
[communication]
tcp_backlog = 2048

[fileio]
max_parallel_io_requests[data] = 64
max_submit_batch_size[data] = 64
```

```

size_kernel_io_queue[data] = 512
async_read_submit[data] = on
async_write_submit_blocks[data] = all
min_submit_batch_size[data] = 16
async_write_submit_active[data] = auto
max_parallel_io_requests[log] = 64
max_submit_batch_size[log] = 64
size_kernel_io_queue[log] = 512
async_read_submit[log] = on
async_write_submit_blocks[log] = all
min_submit_batch_size[log] = 16
async_write_submit_active[log] = auto

[multidb]
mode = multidb
database_isolation = low
singletenant = yes

[persistence]
basepath_datavolumes = /hana/data/HIT
basepath_logvolumes = /hana/log/HIT

```

Product descriptions

The following information describes the hardware and software components used in this reference architecture.

Hitachi Advanced Server DS220

With a combination of two Intel Xeon Scalable processors and high storage capacity in a 2U rack-space package, [Hitachi Advanced Server DS220](#) delivers the storage and I/O to meet the needs of converged solutions and high-performance applications in the data center.

The Intel Xeon Scalable processor family is optimized to address the growing demands on today's IT infrastructure. The server provides 24 slots for high-speed DDR4 memory, allowing up to 3 TB of memory per node when 128 GB DIMMs are used. This server supports up to 12 large form factor storage devices and an additional 2 small form factor storage devices.

This server has three storage configuration options:

- 12 large form factor storage devices and an additional 2 small form factor storage devices in the back of the chassis
- 16 SAS or SATA drives, 8 NVMe drives, and an additional 2 small form factor storage devices in the back of the chassis
- 24 SFF devices and an additional 2 SFF storage devices in the back of the chassis

Hitachi Virtual Storage Platform

Hitachi Virtual Storage Platform G350 and Virtual Storage Platform F350 were used when validating this environment with external storage.

Hitachi Virtual Storage Platform G series family

The Hitachi Virtual Storage Platform G series family enables the seamless automation of the data center. It has a broad range of efficiency technologies that deliver maximum value while making ongoing costs more predictable. You can focus on strategic projects and consolidating more workloads while using a wide range of media choices.

The benefits start with Hitachi Storage Virtualization Operating System RF. This includes an all new enhanced software stack that offers up to three times greater performance than our previous midrange models, even as data scales to petabytes

Hitachi Virtual Storage Platform G series offers support for containers to accelerate cloud-native application development. Provision storage in seconds, and provide persistent data availability, all the while being orchestrated by industry leading container platforms. Move these workloads into an enterprise production environment seamlessly, saving money while reducing support and management costs.

Hitachi Virtual Storage Platform F Series family

Use Hitachi Virtual Storage Platform F series family storage for a flash-powered cloud platform for your mission critical applications. This storage meets demanding performance and uptime business needs. Extremely scalable, its 4.8 million random read IOPS allows you to consolidate more applications for more cost savings.

Hitachi Virtual Storage Platform F series family delivers superior all-flash performance for business-critical applications, with continuous data availability.

SAP HANA

SAP HANA converges database and application platform capabilities in-memory to transform transactions, analytics, text analysis, predictive and spatial processing so businesses can operate in real-time. This combines database, data processing, and application platform capabilities in a single in-memory platform. Also, the platform provides libraries for predictive, planning, text processing, spatial, and business analytics — all on the same architecture. This architecture comes from leading hardware partners of SAP, including Hitachi Vantara. For more information, see <https://www.sap.com/products/hana.html>.

By eliminating the divide between transactions and analytics, SAP HANA allows you to answer any business question anywhere in real time.

As a SAP customer, you can [download more information](#), including the following:

- SAP HANA Master Guide

This is the central starting point for the technical implementation of SAP HANA. Use this guide for basic concepts and for planning.

- SAP HANA Server Installation and Update Guide

This guide provides an overview of how to install and update a SAP HANA system with the SAP HANA lifecycle management tools.

- SAP HANA Administration Guide

This guide explains how to configure, manage, maintain, and optimize your SAP HANA installation using SAP HANA administration tools.

[SAP HANA hardware directory](#) provides information about SAP HANA appliances certified by SAP hardware partners.

Operating system options for SAP HANA

SUSE Linux Enterprise Server for SAP Applications and Red Hat Enterprise Linux for SAP HANA are available operating systems when running SAP HANA.

- SUSE Linux Enterprise Server (SLES) for SAP Applications

Compete more effectively through improved uptime, better efficiency, and accelerated innovation using [SUSE Linux Enterprise Server for SAP Applications](#). This is a versatile server operating system for efficiently deploying highly available enterprise-class IT services in mixed IT environments with performance and reduced risk.

SUSE Linux Enterprise Server was the first Linux operating system to be certified for use with SAP HANA. It remains the operating system of choice for most SAP HANA customers.

- Red Hat Enterprise Linux (RHEL) for SAP HANA

Using the stability and flexibility of [Red Hat Enterprise Linux for SAP HANA](#), reallocate your resources towards meeting the next challenges instead of maintaining the status quo. Deliver meaningful business results by providing exceptional reliability and military-grade security. Use Enterprise Linux to tailor your infrastructure as markets shift and technologies evolve.

Changing the configuration settings is only supported along the guidelines of SAP and the operating system distributor and may otherwise cause significant performance problems. The following SAP Notes for SUSE Linux Enterprise Server and Red Hat Enterprise Linux are a good starting point for information on this topic:

- [1944799 - SAP HANA Guidelines for SLES Operating System Installation](#)
- [2009879 - SAP HANA Guidelines for Red Hat Enterprise Linux \(RHEL\) Operating System](#)

For more details, see "Updating and Patching the Operating System" by searching in the "View SAP HANA document" from [Technical Information and Best Practices](#).

Hitachi Vantara

Corporate Headquarters
2535 Augustine Drive
Santa Clara, CA 95054 USA



HitachiVantara.com/contact